


AMBIUM®

SLIMBRIGHT-WHT PREMIUM

10, 15 and 20 Watt versions

Constantly improving light output and the quality of light, the Slimbright 300 is extremely robust and flexible. Guaranteed uniform color bin and lighting. This Slimbright is adjustable in length and very easy to install with tape or mounting clips to suit all your lighting designs and applications.

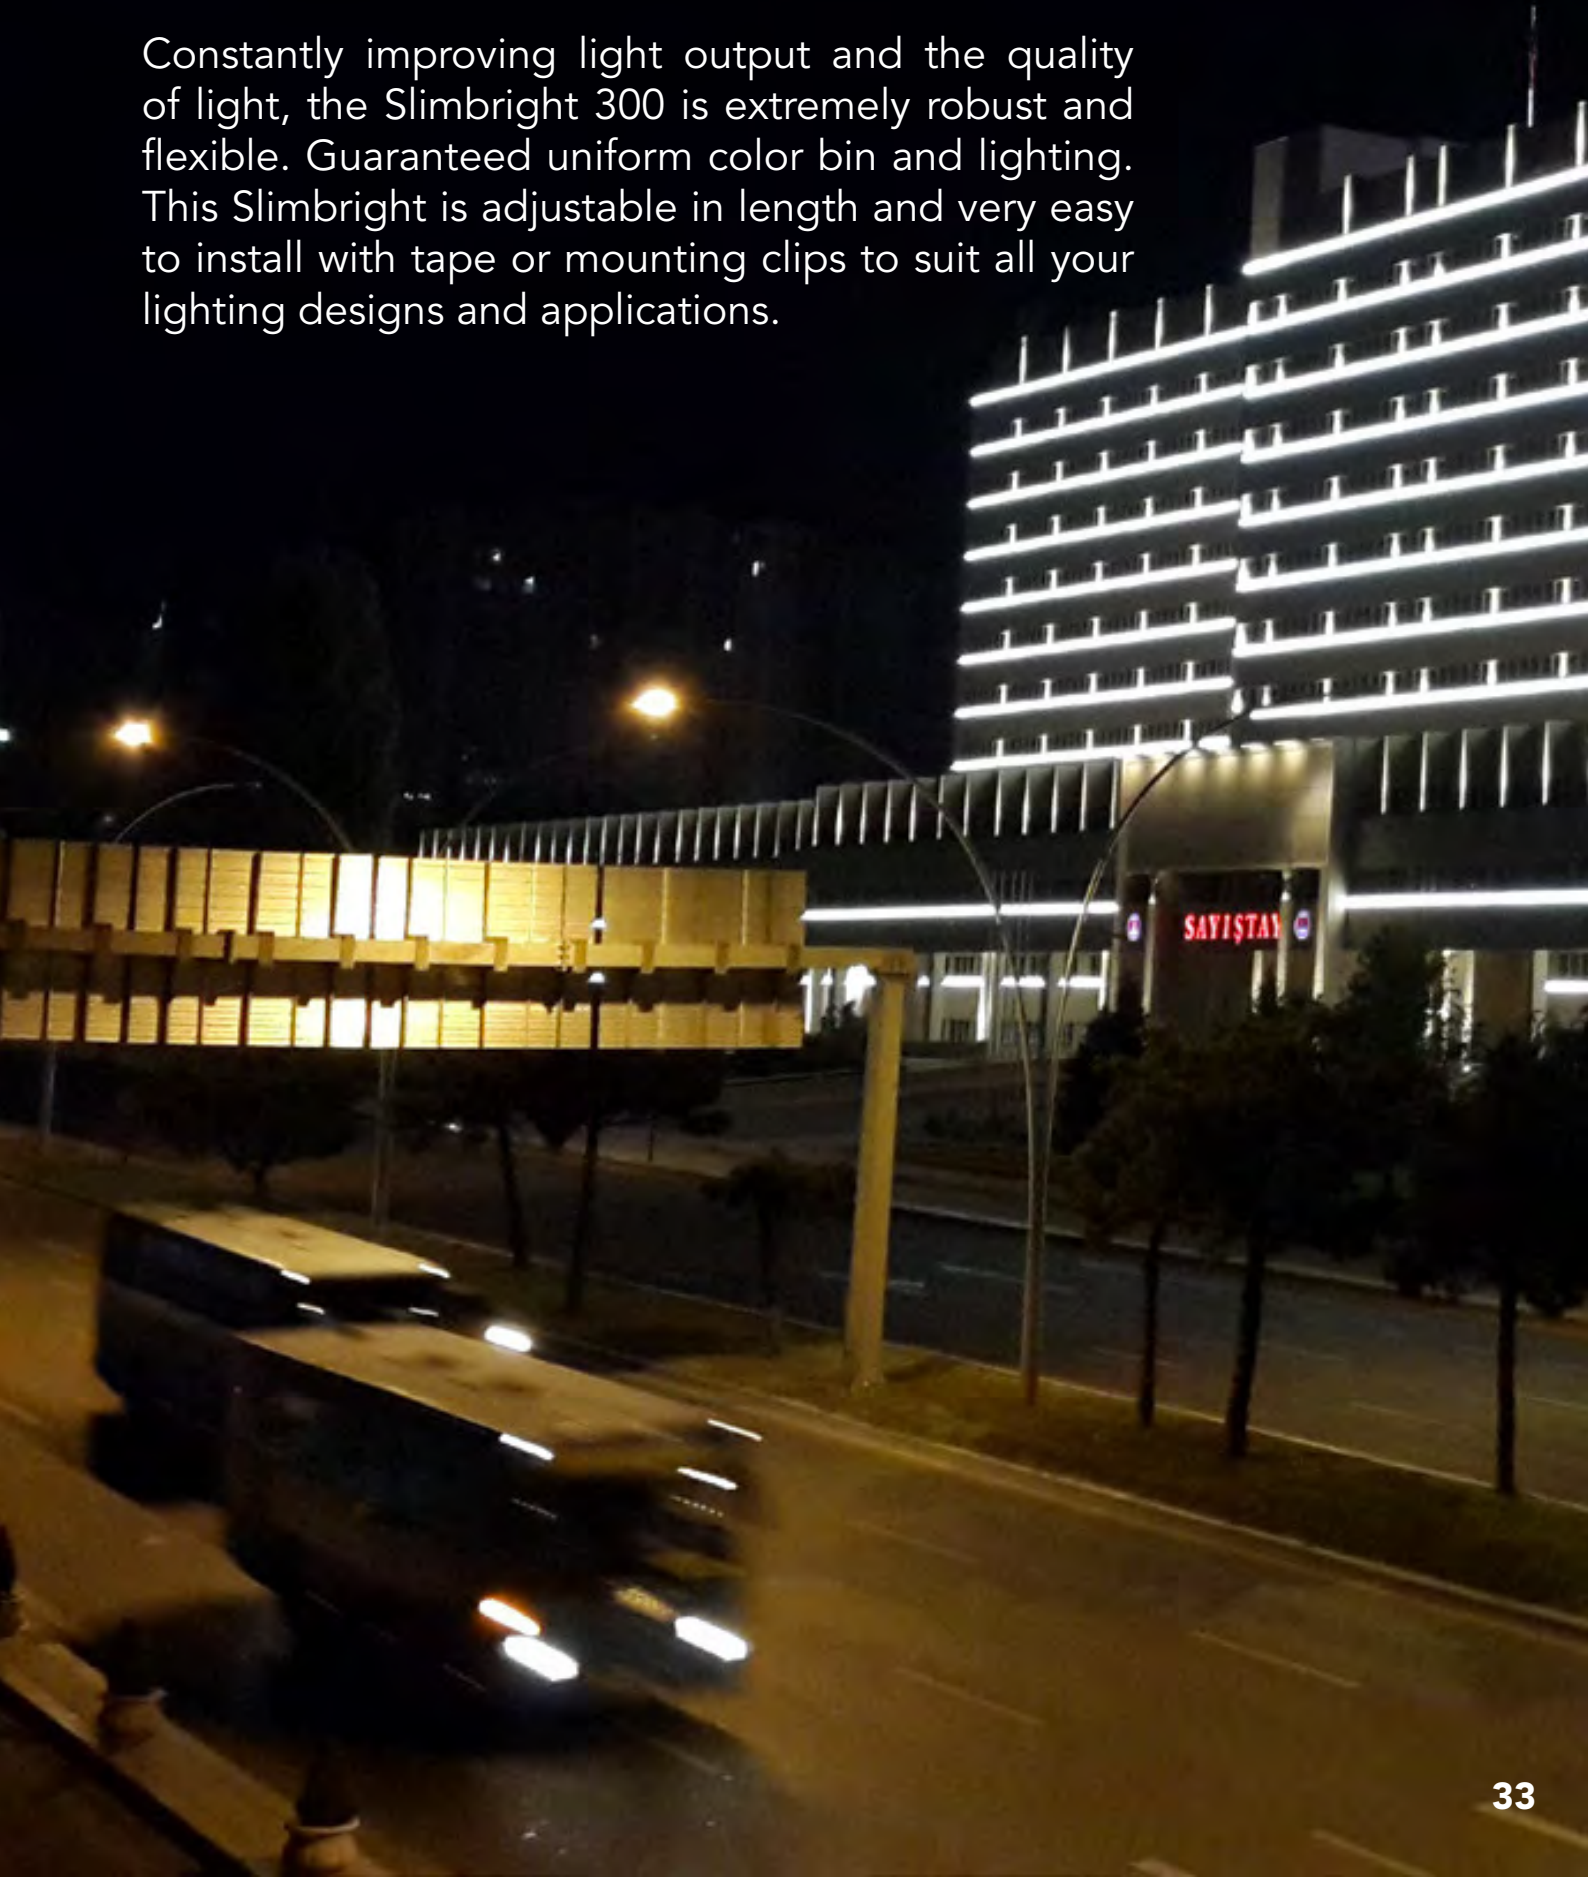

AMBIUM® SLIMBRIGHT-WHT PREMIUM 10 WATT



SPECIFICATIONS




ARTICLE NUMBER	PRODUCT	COLOR TEMP	LUMEN OUTPUT	POWER	EFFICIENCY	CRI	VOLT-AGE	LEDS/m	IP RATING	TEMP
		K	Lm/m	W/m	LM/W		V			°C
KSB3PW027012	Slimbright 300-WHT 827 1000mm 10W	2700	1168	10	100	80+	24	56	67	-20 to 60
KSB3PW030012	Slimbright 300-WHT 830 1000mm 10W	3000	1170	10	100	80+	24	56	67	-20 to 60
KSB3PW040012	SlimBright 300-WHT 840 1000mm 10W	4000	1173	10	100	80+	24	56	67	-20 to 60
KSB3PW065012	SlimBright 300 WHT 865 1000mm 10W	6500	1176	10	100	80+	24	56	67	-20 to 60
KSB3PW027052	Slimbright 300-WHT 827 5000mm 10W	2700	1168	10	100	80+	24	280	67	-20 to 60
KSB3PW030052	Slimbright 300-WHT 830 5000mm 10W	3000	1170	10	100	80+	24	280	67	-20 to 60
KSB3PW040052	SlimBright 300-WHT 840 5000mm 10W	4000	1173	10	100	80+	24	280	67	-20 to 60
KSB3PW065052	SlimBright 300 WHT 865 5000mm 10W	6500	1176	10	100	80+	24	280	67	-20 to 60


*Lumen values are typical. Allow +/- 10% for color binning tolerance.

DIMENSIONS (MM)

PRODUCT	A1	A2	B1	C1
	mm	mm	mm	mm
1m version	1020	1000	12.9	5.4
5m version	5020	5000	12.9	5.4

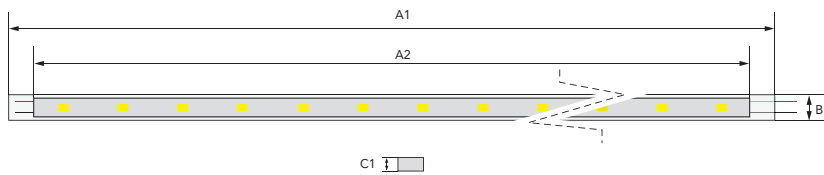

LIGHT DIAGRAM

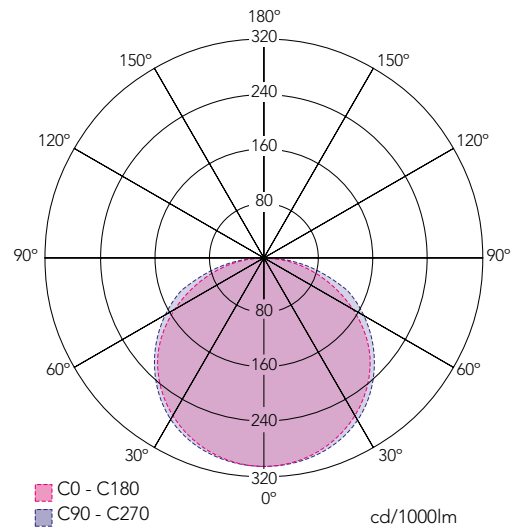

AMBIUM®

SLIMBRIGHT-WHT PREMIUM

15 WATT



SPECIFICATIONS




ARTICLE NUMBER	PRODUCT	COLOR TEMP K	LUMEN OUTPUT Lm/m	POWER W/m	EFFICIENCY LM/W	CRI	VOLTAGE V	# LEDS	IP RATING	TEMP °C
KSB3PW027112	Slimbright 300-WHT 827 1000mm 15W	2700	1780	15	100	80+	24	56	67	-20 to 60
KSB3PW030112	Slimbright 300-WHT 830 1000mm 15W	3000	1850	15	100	80+	24	56	67	-20 to 60
KSB3PW040112	Slimbright 300-WHT 840 1000mm 15W	4000	1890	15	100	80+	24	56	67	-20 to 60
KSB3PW065112	Slimbright 300 WHT 865 1000mm 15W	6500	1950	15	100	80+	24	56	67	-20 to 60
KSB3PW027152	Slimbright 300-WHT 827 5000mm 15W	2700	1780	15	100	80+	24	280	67	-20 to 60
KSB3PW030152	Slimbright 300-WHT 830 5000mm 15W	3000	1850	15	100	80+	24	280	67	-20 to 60
KSB3PW040152	Slimbright 300-WHT 840 5000mm 15W	4000	1890	15	100	80+	24	280	67	-20 to 60
KSB3PW065212	Slimbright 300 WHT 865 5000mm 15W	6500	1950	15	100	80+	24	280	67	-20 to 60


* Lumen values are typical. Allow +/- 10% for color binning tolerance.

DIMENSIONS (MM)

PRODUCT	A1	A2	B1	C1
	mm	mm	mm	mm
1m version	1020	1000	12.9	5.4
5m version	5020	5000	12.9	5.4

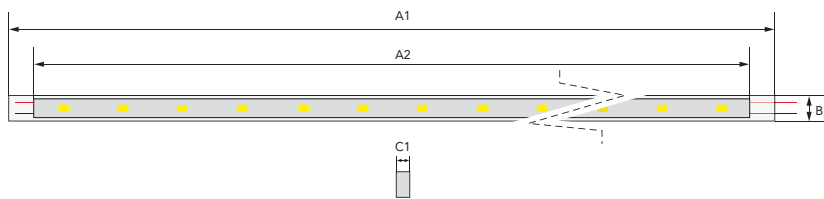

LIGHT DIAGRAM

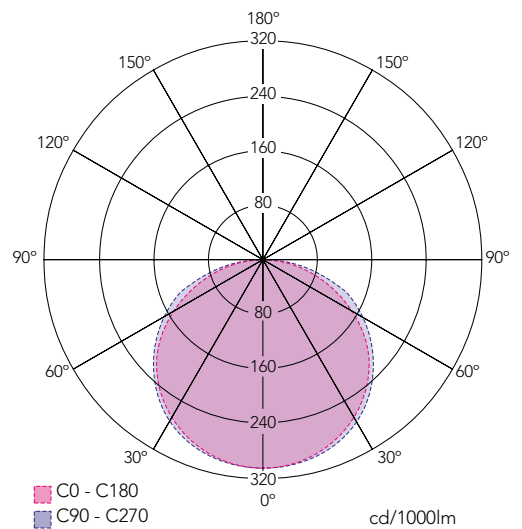

AMBIUM® SLIMBRIGHT-WHT PREMIUM 20 WATT



SPECIFICATIONS




ARTICLE NUMBER	PRODUCT	COLOR TEMP K	LUMEN OUTPUT Lm/m	POWER W/m	EFFICIENCY LM/W	CRI	VOLTAGE V	# LEDS	IP RATING	TEMP °C
KSB3PW027212	Slimbright 300-WHT 827 1000mm 20W	2700	2045	20	100	80+	24	56	67	-20 to 60
KSB3PW030212	Slimbright 300-WHT 830 1000mm 20W	3000	2095	20	100	80+	24	56	67	-20 to 60
KSB3PW040212	Slimbright 300-WHT 840 1000mm 20W	4000	2180	20	100	80+	24	56	67	-20 to 60
KSB3PW065212	Slimbright 300 WHT 865 1000mm 20W	6500	2250	20	100	80+	24	56	67	-20 to 60
KSB3PW027252	Slimbright 300-WHT 827 5000mm 20W	2700	2045	20	100	80+	24	280	67	-20 to 60
KSB3PW030252	Slimbright 300-WHT 830 5000mm 20W	3000	2095	20	100	80+	24	280	67	-20 to 60
KSB3PW040252	Slimbright 300-WHT 840 5000mm 20W	4000	2180	20	100	80+	24	280	67	-20 to 60
KSB3PW065252	Slimbright 300 WHT 865 5000mm 20W	6500	2250	20	100	80+	24	280	67	-20 to 60

* Lumen values are typical. Allow +/- 10% for color binning tolerance.

DIMENSIONS (MM)

PRODUCT	A1	A2	B1	C1
	mm	mm	mm	mm
1m version	1020	1000	12.9	5.4
5m version	5020	5000	12.9	5.4

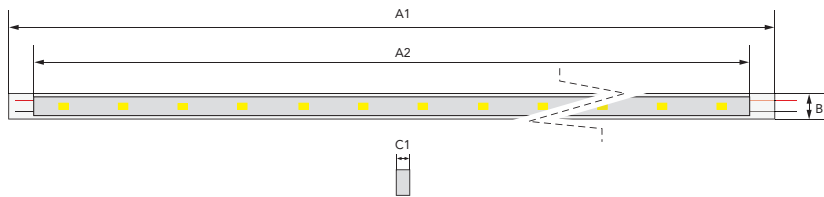

LIGHT DIAGRAM

