

DEPARTURES →

Privium®

POSTERBOX Constant Current

Within our world famous Posterbox 400 series we offer a string version with all the looks & feels of its bigger brother. A very competitive price and the quality you are used to. It is a unique low cost constant current solution for uniform illumination of light-boxes.



POSTERBOX CONSTANT CURRENT




SPECIFICATIONS



ARTICLE NUMBER	PRODUCT	COLOR TEMP K	LUMEN OUTPUT lm*	POWER W	EFFICIENCY lm/W	CRI	VOLTAGE V	# LEDS L/M*	IP RATING	TEMP °C
K929600213	Privium Posterbox 402-CC 827*	2700	2010	21	96	80+	36	2	66	-20 to 60
K929600413	Privium Posterbox 402-CC 840*	4000	2040	21	97	80+	36	2	66	-20 to 60
K929483013	Privium Posterbox 402-CC 857*	5700	2040	21	97	70+	36	2	66	-20 to 60
K929483313	Privium Posterbox 402-CC 865*	6500	2190	21	104	80+	36	2	66	-20 to 60
KPBO210427	Privium Posterbox 454-CC 827*	2700	816	10.5	78	80+	36	4	66	-20 to 60
KPBO210440	Privium Posterbox 454-CC 840*	4000	1008	10.5	96	80+	36	4	66	-20 to 60
KPBO210465	Privium Posterbox 454-CC 865*	6500	1194	10.5	114	70+	36	4	66	-20 to 60

* One Posterbox 402-CC string is 6 modules long.
 LM* LM are measured at 1 meter above the module. Lumen values are typical. Allow +/- 10% for color binning tolerance.
 The Affinium Posterbox Outdoor is intended for built-in outdoor & indoor use only.
 The Posterbox should not be directly exposed to the elements like snow, water and ice.
 L/M* Leds per module.

SCHEMATIC

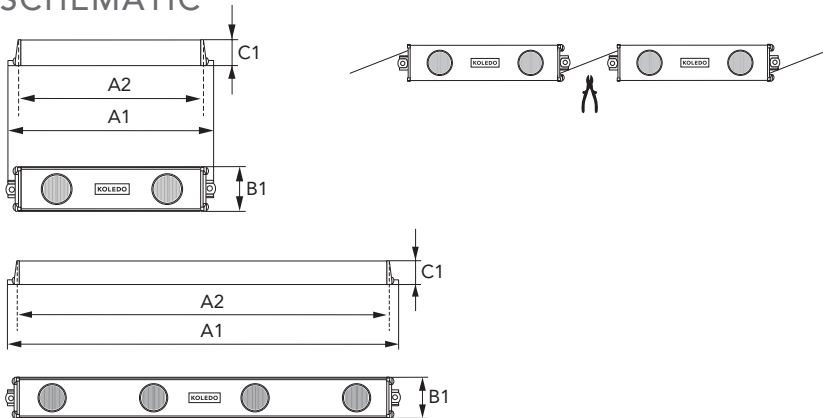

DIMENSIONS (MM)

PRODUCT	A1	A2	B1	C1	# LEDS
	mm	mm	mm		
Privium Posterbox 402-CC	180	155	37.5	16	2
Privium Posterbox 454-CC	371	351	37.5	16	4

LIGHT DIAGRAM

