

## PRIVIUM® POSTERBOX ECONOMY

The Posterbox 460 series sets new standards for high quality rectangular box signs or box displays. The Privium Posterbox 460 outdoor is fully weatherproof. All outdoor Posterbox modules have an IP66 and IP67 rating, which ensures high reliability. Koledo Posterbox 460 series starts instantly, even at temperatures as low as -20°C.

# PRIVIUM® POSTERBOX ECONOMY





## SPECIFICATIONS



ARTICLE NUMBER	PRODUCT	COLOR TEMP K	LUMEN OUTPUT lm*	POWER W	EFFICIENCY lm/W	CRI	VOLTAGE V	# LEDS L/M*	IP RATING	TEMP °C
KPBE246627	Privium Posterbox 466-EC 827	2700	860	10.8	90	80+	24	6	20	-20 to 60
KBPE246630	Privium Posterbox 466-EC 830	3000	912	10.8	94	80+	24	6	20	-20 to 60
KBPE246640	Privium Posterbox 466-EC 840	4000	1036	10.8	106	80+	24	6	20	-20 to 60
KBPE246665	Privium Posterbox 466-EC 865	6500	1310	10.8	131	70+	24	6	20	-20 to 60
KPBE246327	Privium Posterbox 463-EC 827	2700	430	5.2	83	80+	24	3	20	-20 to 60
KPBE246330	Privium Posterbox 463-EC 830	3000	458	5.2	88	80+	24	3	20	-20 to 60
KPBE246340	Privium Posterbox 463-EC 840	4000	516	5.2	99	80+	24	3	20	-20 to 60
KPBE246365	Privium Posterbox 463-EC 865	6500	696	5.2	134	70+	24	3	20	-20 to 60

lm\* Lumen are measured at 1 meter above the module. Lumen values are typical. Allow +/- 10% for color binning tolerance.  
The Affinium Posterbox Outdoor is intended for built-in outdoor & indoor use only.  
The Posterbox should not be directly exposed to the elements like snow, water and ice.  
L/M\* Leds per module.

## SCHEMATIC

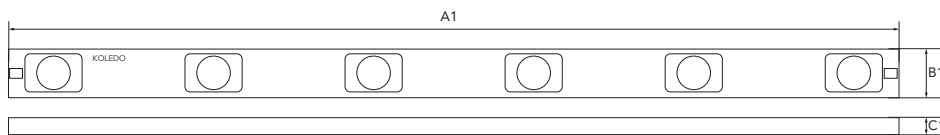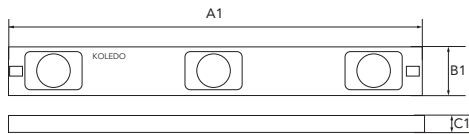

## DIMENSIONS (MM)

PRODUCT	A1	B1	C1	# LEDS
	mm	mm		
Privium Posterbox 466-EC	532	25	16	6
Privium Posterbox 463-EC	245	25	16	3

## LIGHT DIAGRAM

